

GASFLOW
BETA SERIES REGULATORS
(2.5 - 6 - 10 - 16 - 25 - 30 - 50 m³/h)



BETA Series regulators are two-stage, self-operated pressure regulators for domestic and low capacity commercial use for NG, LPG, Town Gas, Methane, Air (Please consider density correction factor for gases other than NG for nominal capacity selection). Equipped with excess flow plug against increase in outlet flow rate or decrease in outlet pressure (**non - adjustable UPSO**). The discharge of the internal relief valve can be conveyed outside in case of installation in closed rooms or underground installations.

BETA - Series (2.5m³/h → 50m³/h) can be used at outlet pressure between **9→500 mbar** by configuring property of the regulator bill of materials.

BETA - Series regulators are designed to be installed outdoor/indoor, wall mounted/underground box with different inlet/ outlet configurations (**Angle, Inline, U, T, Q**) in individual domestic gas systems and meters.


Inlet and outlet connections can be customized according to customer needs and standards.

Thanks to smart engineering to achieve high reliability and accuracy in regulation yielding measurement correction errors to keep at minimum level.

All service regulators are produced according to the international norms and standards such as EN88-2 and TS 10624.


Two Stage Service Regulator with OPSO/USPO Safety Shut-Off Valve

	DESCRIPTION	STANDARD	OPTION	CUSTOMIZABLE FEATURE
MAIN FEATURES	MAX. INLET PRESSURE -Pe, (bar)	6	-	Other Values
	OUTLET PRESSURE -Po, (mbar)	21	300	9 - 500
	INLET CONNECTION	¾"	½", 1", 1 ¼"	Others
	OUTLET CONNECTION	1 ¼"	1", 1 ¼", 1 ½", 2"	Others
	RE-ARMING	SSV	-	-
	INLET FILTER	Brass Mesh	Stainless Steel	Different Materials
	INLET TEST POINT	-	Yes	-
	OUTLET TEST POINT	-	Yes	-
	SURFACE PREPARATION	Sand Blasted	Colour Codes	Coating
	APPLICABLE STANDARTS	EN88-2	NF, TS 10624	Others
	FUNCTIONAL TEST RATIO (%)	100	-	Additional tests

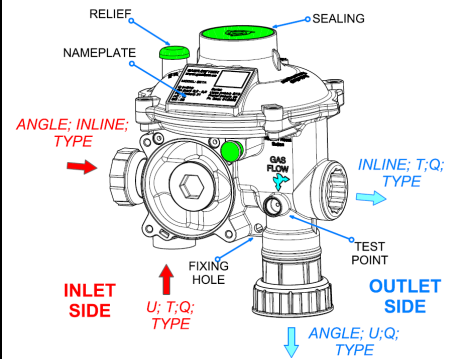

SAFETY	EXCESS FLOW SAFETY	Excess Flow Plug	-	-
	OPSO WITH RELIEF	Yes	No	-
	OPSO WITH SSV	Hayır	-	-
	USPO WITH SSV	Ayarlanmayan	-	-
	SEALING	Special Design	2 nd Stg cover	Different Locations

OPERATING CHARACTERISTICS	APPLICATION SPACE	Outdoor	Indoor ^(*)	-
	APPLICATION TYPE	Wall Mounted	Underground	-
	ASSEMBLY CONFIGURATION	Angle, Inline, U, T, Q	-	-
	ACCURACY CLASS -AC/RG (%)	±10	±5	Intermediate Values
	LOCK-UP ACCURACY CLASS -SG(%)	20	10	Between 10-20%
	HYSTRESIS (%)	10	-	-
	EXCESS FLOW RANGE (m ³ /h)	Qn*(110-150)%	Qn*(120-150)%	-
	LOCK-UP ZONE -SZ (%)	10	-	Other values
	RELIEF TOLERANCE (%)	±10	-	Other values
	AMBIENT TEMPERATURE (°C)	-20 : 60 (EN88-2)	-10 : 50 (TS 10624)	Arctic
	FLUID TYPE	NG, LPG, Town Gas, Methane, Air	-	Others

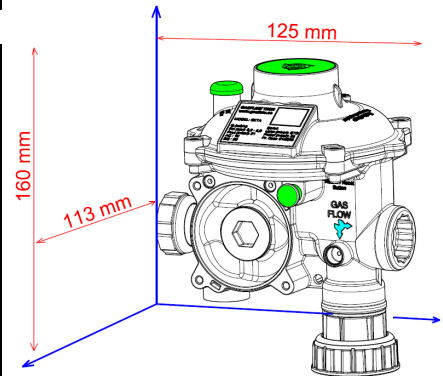


(*) The discharge of the internal relief valve must be conveyed outside in case of installation in closed rooms or underground installations

MATERIALS	BODY, COVERS	AL (TS EN 1706)	ZAMAK-5	Other ZAMAK types
	SPRINGS	Carbon Steel	Stainless Steel	Other Materials
	ORIFICES	CuZn39Pb3	-	Other Materials
	DIAPHRAGMS, ORINGS	NBR (EN549)	-	-
	CONNECTION PARTS	CuZn40Pb2, AL	-	Other Materials
	INTERNALS	Brass, Al, ZAMAK, POM, PA	-	Other Materials



Images and dimensions are for reference purposes and may vary depending on the preferences made. **GASFLOW TEKNOLOJİ LİMİTED ŞİRKETİ** reserves the right to change its product models and technical information without prior notice

● INLET PRESSURE ● OUTLET PRESSURE
● INTERMEDIATE PRESSURE ○ ATMOSPHERIC PRESSURE

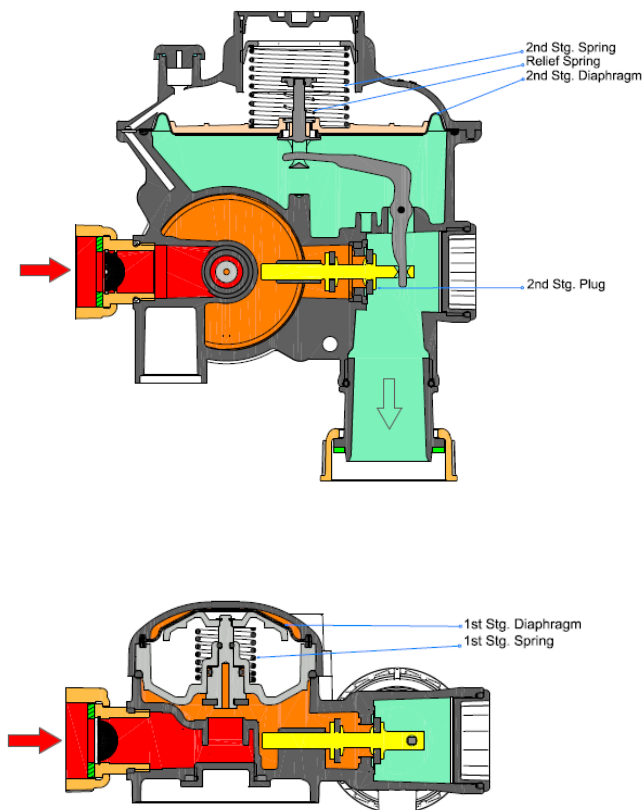

GENERAL

The primary function of a spring loaded double stage gas regulator is to match the flow of gas through the regulator to the demand for gas placed upon the system. At the same time, the regulator must maintain the system pressure within certain acceptable limits.

Since the regulator's job is to modulate the flow of gas into the system, restricting element (**1 and 2 stage plug**) that will fit into the flow stream is essential and needed to provide a variable restricted modulation of the flow of gas through the regulator.

In order to cause restricting element to vary, loading element (**1 Stage, 2 Stage, relief springs**) is needed which can apply the required force limits to the restricting element. And measuring element (**1 and 2 diaphragm**) which tells regulator when flow has been perfectly matched and characterized to desired values is needed.


For secure operation, outlet pressure over than set value is managed by **built-in relief valve**, whereas below than outlet set pressure value is managed by **non adjustable UPSO with excess flow plug (UPSO plug)** which also monitors inlet pressure synchronously with outlet pressure.

Excess flow plug acts as flow capacity manager for excess flow range and also contributes operating characteristics.

Built-in relief valve triggers when set value is reached to compensate outlet pressure increase such as thermal expansion in downstream even appliances are off. When the spring-loaded double-stage excess flow gas regulator is designed and produced with the above elements, it has a typical regulator performance curve as in the graph.

OPERATION

Making sure all the utility/appliance connections are closed securely, by opening regulator upstream valve slightly and slowly, gas with inlet pressure initially flows through the inlet filter and comes in front of the excess flow plug. Then push re-arm button which will convey gas under 2 Stg Diaphragm where pressure is reduced to the desired outlet value. Downstream pressure must be observed whether at desired values. After completing the procedure release push button.

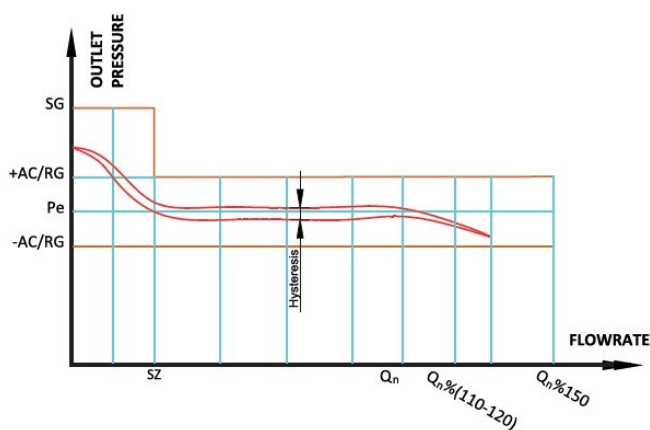

FLUID	d
AIR	1
TOWN GAS	0,44
BUTANE	2,01
PROPANE	1,53
ETHANE	1,05
METHANE	0,55

$$Q_{\text{Natural Gas}} * \sqrt{\frac{176,68}{d * (273 + T)}} = Q_{\text{Other Gas}}$$

d = Relative density other than natural gas

T = Ambient temperature [°C]

Note: Non-exist / intermediate capacity values can be possible on request !